







## Specifications of „size 2” housings and short overview of installation possibilities for series A 10 and D 15 inserts

### Housings

Material:	Aluminium die casting
Surface:	Powder coated
Locking levers:	Zinc-plated steel
Housing seal:	NBR
Temperature range:	- 40 °C up to + 125 °C (depending on cable gland)
Protection degree acc. to DIN EN 60 529:	IP 65 (in locked condition)

8

The housings shown on the following pages can be equipped with the inserts listed below:

	Screw terminal inserts		Crimp contact carriers	
<b>A 10</b> 4 p. 16	Female insert, screw terminal, Part no. 700 110 	Male insert, screw terminal, Part no. 700 210 	Crimp contact carrier for sleeve contacts, Part no. 700 310 	Crimp contact carrier for pin contacts, Part no. 700 410 
<b>D 15</b> 4 p. 42			Crimp contact carrier for sleeve contacts, Part no. 720 315 	Crimp contact carriers for pin contacts, Part no. 720 415 


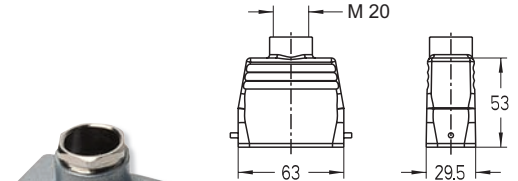
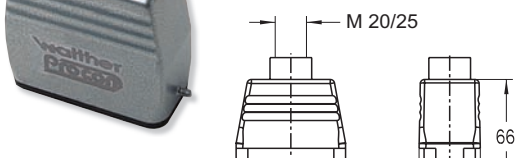
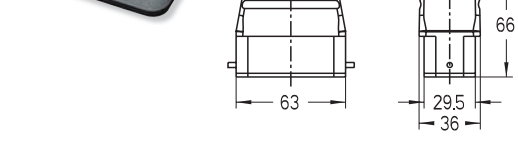
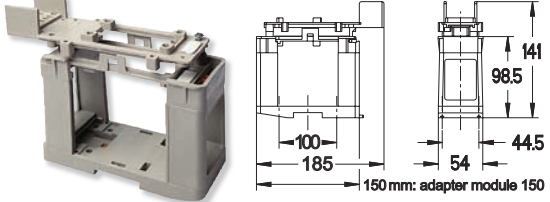
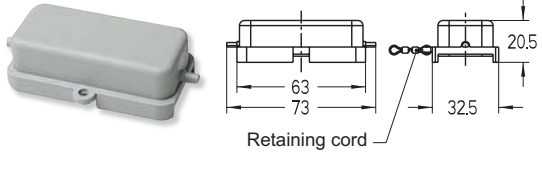
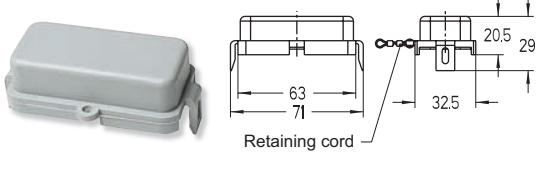
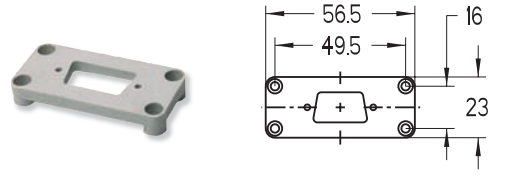
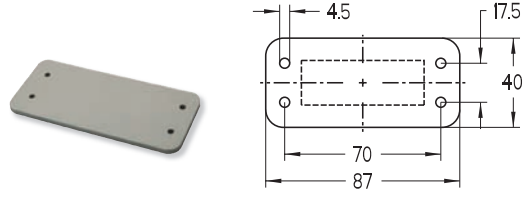
4 The page reference at the left of the table guides you to the detailed overview of inserts.


### Contacts for crimp contact carriers of series ...

A 10: see page 16

D 15: see page 43

Description	Previous part number	New part number	M	Housings for series A 10 and D 15	
<b>Housings: single locking system</b>					
<b>Wall mount housing, height 52 mm</b> with single locking system					
<b>with collar</b> with cable gland	701 410 OV 701 410	<b>T 701 410 MS</b> T 701 410 MV	1 x M 20		<b>10</b> 197 210  195 222
<b>with collar</b> with cable gland	701 510 OV 701 510	<b>T 701 510 MS</b> T 701 510 MV	2 x M 20		
<b>Panel housing, height 26 mm</b> with single locking system					
Panel cut out 57.5 x 24 mm	<b>704 310</b>				<b>10</b> 76
<b>Wall mount housing, height 52 mm</b> with single locking system, with hinged cover					
<b>with collar</b> with cable gland	701 610 OV 701 610	<b>T 701 610 MS</b> T 701 610 MV	1 x M 20		<b>10</b> 219 232  217 244
<b>with collar</b> with cable gland	701 710 OV 701 710	<b>T 701 710 MS</b> T 701 710 MV	2 x M 20		
<b>Panel housing, height 26 mm</b> with single locking system, with hinged cover					
Panel cut out 57.5 x 24 mm	<b>704 410</b>				<b>10</b> 98
<b>Coupler hoods, height 52 mm</b> with single locking system, top cable entry					
<b>with collar</b> with cable gland	703 810 OV 703 810	<b>T 703 810 MS</b> T 703 810 MV	1 x M 20		<b>10</b> 108 121
<b>Hoods, height 53 mm</b> for single locking system, side cable entry					
<b>with collar</b> with cable gland	702 610 OV 702 610	<b>T 702 610 MS</b> T 702 610 MV	1 x M 20		<b>10</b> 78 92
<b>Hoods, height 66 mm</b> for single locking system, side cable entry					
<b>with threaded hole</b> with collar with cable gland	708 610 OS 708 610 OV 708 610	<b>T 708 610</b> T 708 610 MS T 708 610 MV	1 x M 20		<b>10</b> 139 154 168
<b>with threaded hole</b> with collar with cable gland	708 710 OS 708 710 OV 708 710	<b>T 708 710</b> T 708 710 MS T 708 710 MV	1 x M 25		

Description	Previous part number	New part number		Housings for series A 10 and D 15	
<b>Housings: single locking system</b>					
<b>Hoods, height 53 mm</b> for single locking system, top cable entry					
with collar with cable gland	702 810 OV 702 810	<b>T 702 810 MS</b> T 702 810 MV	1 x M 20		10 80 94
<b>Hoods, height 66 mm</b> for single locking system, top cable entry					
with threaded hole with collar with cable gland	708 810 OS 708 810 OV 708 810	<b>T 708 810</b> T 708 810 MS T 708 810 MV	1 x M 20		10 139 154 167
with threaded hole with collar with cable gland	708 910 OS 708 910 OV 708 910	<b>T 708 910</b> T 708 910 MS T 708 910 MV	1 x M 25		137 161 182
<b>Snap-on mounting adapter, swing-type</b>					
<b>Snap-on mounting adapter</b>					
Adapter module 150	760 115				5 213
mountable on DIN rails, top can be screwed together with bottom					
<b>Protective covers: plastic</b>					
<b>Protective cover</b> for housings with single locking system					
with retaining cord	700 633				10 11
<b>Protective cover</b> for hoods without single locking system					
with retaining cord	700 637				10 10
<b>Adapter plates for contact inserts</b>					
for installation in series A 10 housings					
Sub miniature, single 9-pole 15-pole 25-pole	700 681 700 677 700 678				10 3 3.5 3.5
<b>Cover plates for switch cabinets</b>					
<b>Cover plates for A 10 panel housings</b>					
grey orange green	700 684 700 686 700 688				10 12 12 12

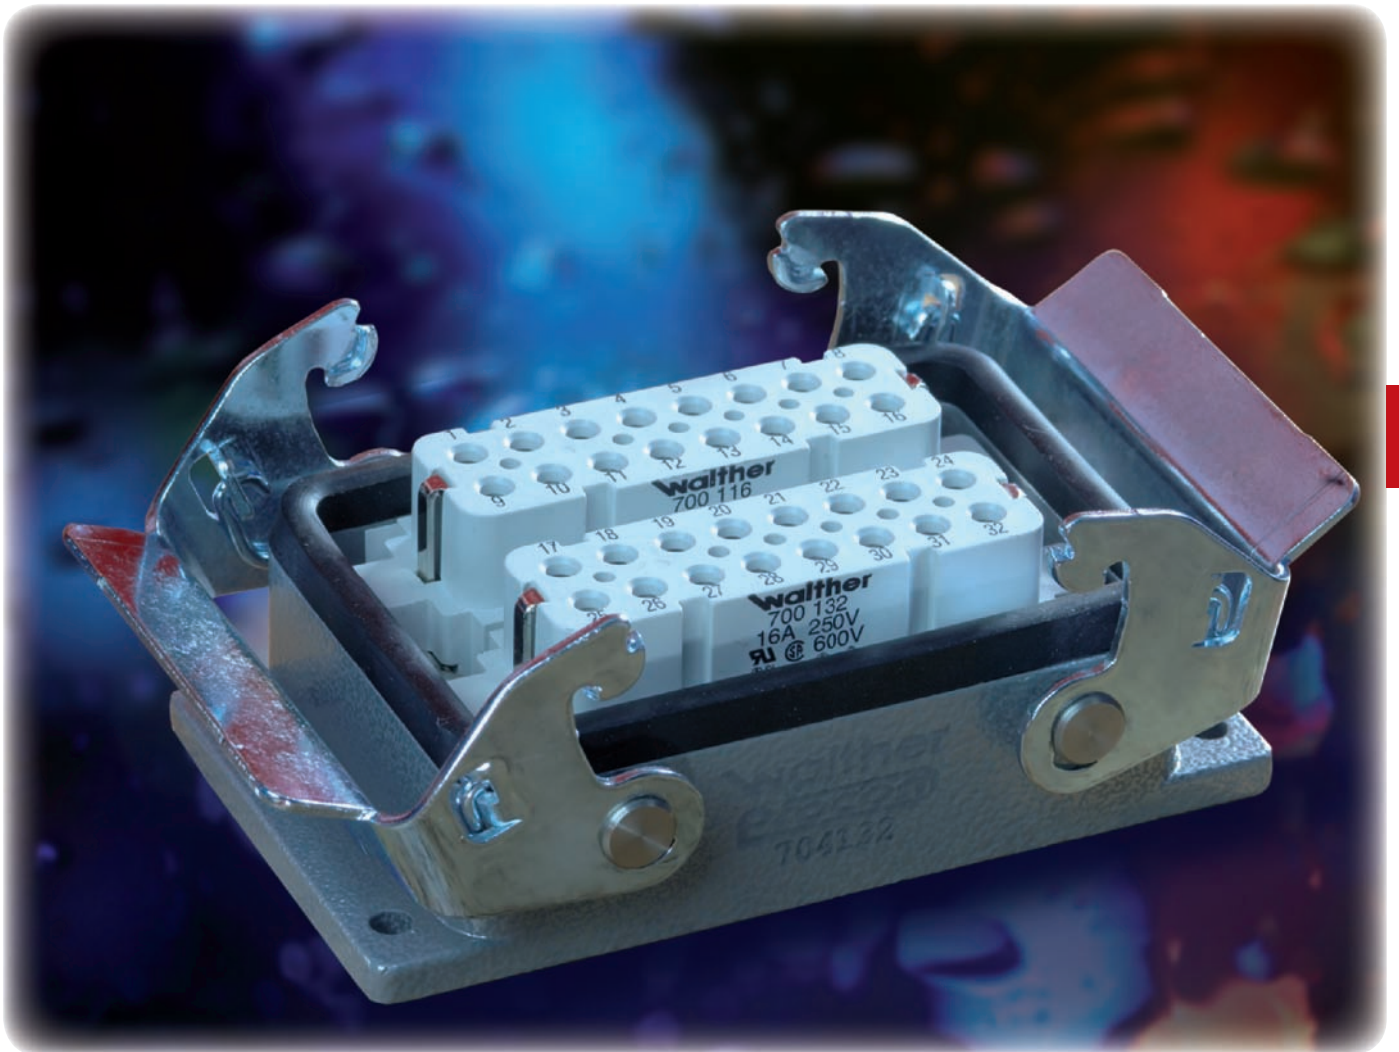

8